

While a ResinDek<sup>®</sup> floor provides long-lasting durability, safety and cleanability, it must be properly installed and maintained to avoid costly floor problems, repairs and hazards that may potentially void all product warranties.


Whether your ResinDek<sup>®</sup> floor finish is Clear Diamond Seal<sup>®</sup>, Gray Diamond Seal<sup>®</sup> or ESD, the surface can be easily cleaned using a damp mop or standard cleaning solvents without fear of damaging the surface. Cleaning solutions that have worked particularly well include water, diluted isopropyl alcohol, and many off the shelf detergents and floor cleaners. **Never use methylene chloride or paint thinners, which will damage ResinDek finishes. Also avoid prolonged soaking, hosing down, or wetting of all ResinDek products.**

**ResinDek UF (unfinished) will clean up similar to other unfinished wood products.**

*\*All cracks and holes should be investigated since these are primarily due to loads in excess of ResinDek<sup>®</sup> recommendations.*

Excessive load damage to ResinDek<sup>®</sup> panels cannot always be repaired, and may need to be replaced. Please contact us and we will be happy to assist you in determining the cause of the panel damage and how best to repair it in accordance with the ResinDek<sup>®</sup> Product Warranty.

For more information about repairing ResinDek panels, contact Cornerstone Specialty Wood Products at 1-888-755-3048 or send an e-mail to [info@resindek.com](mailto:info@resindek.com).

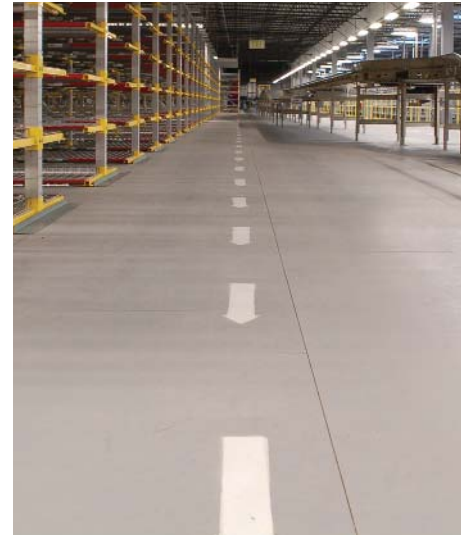

## ResinDek<sup>®</sup> Mezzanine Floor Panels




### Finishes Available

| Product Name                             | Live Dead Pallet Jack Limits   | Thickness | Unfinished | GDS, CDS | ESD |
|--|--------------------------------|-----------|------------|----------|-----|
| ResinDek <sup>®</sup> XLD <sub>50</sub>  | up to 1,250 lbs                | 1/2"      | ■          | ■        | ■   |
| ResinDek <sup>®</sup> LD <sub>50</sub>   | up to 2,000 lbs                | 1/2"      | ■          | ■        | ■   |
| ResinDek <sup>®</sup> LD                 | up to 2,000 lbs.               | 3/4"      | ■          | ■        | ■   |
| ResinDek <sup>®</sup> MD                 | up to 3,000 lbs.               | 3/4"      | n/a        | ■        | ■   |
| ResinDek <sup>®</sup> HD                 | up to 4,500 lbs.               | 3/4"      | n/a        | ■        | ■   |
| ResinDek <sup>®</sup> MAX                | Up to 8,000 lbs.               | 1-1/2"    | n/a        | ■        | ■   |
| ResinDek <sup>®</sup> Xspan <sup>®</sup> | Up to 3,000 bs - No Corrugated | 1-1/8"    | n/a        | ■        | ■   |

#### Finishes Available

Gray Diamond Seal<sup>®</sup>  
Clear Diamond Seal<sup>®</sup>  
ESD Certified Static Control

#### Options

Invisi-Loc<sup>®</sup> fasteners  
T & G Configurations  
No Added Formaldehyde 

*All ResinDek Products can contribute towards earning points for LEED<sup>®</sup> qualified buildings.*



[www.resindek.com](http://www.resindek.com)



10179 Wayne Avenue  
Cincinnati, OH 45215  
Toll Free: 888.755.3048  
Tel: 513.772.5560  
Fax: 513.772.5561  
[www.resindek.com](http://www.resindek.com)