

More Than Mezzanine Flooring[™]


More High Performance with

Gray Diamond Seal 2[™]

Gray Diamond Seal 2[™] is the standard by which all other coatings in our industry are measured. This superior finish is designed and engineered for long-lasting durability and will look beautiful with a showcase appearance year after year.

- Exceptional resistance to common stains - tested in accordance with NEMA LD 3.4 with 29 different reagents.
- Superior wear resistance – tested in accordance with Taber Abrasion ASTM D4060.
- Superior scratch resistance – tested in accordance with Hoffman Scratch Hardness Tester.
- Standard with anti-static protection (also available with optional ESD, electrostatic dissipative, protection).
- Can be easily cleaned using a damp mop or standard cleaning solvents without the fear of damaging the surface.

Testing data is available on request.

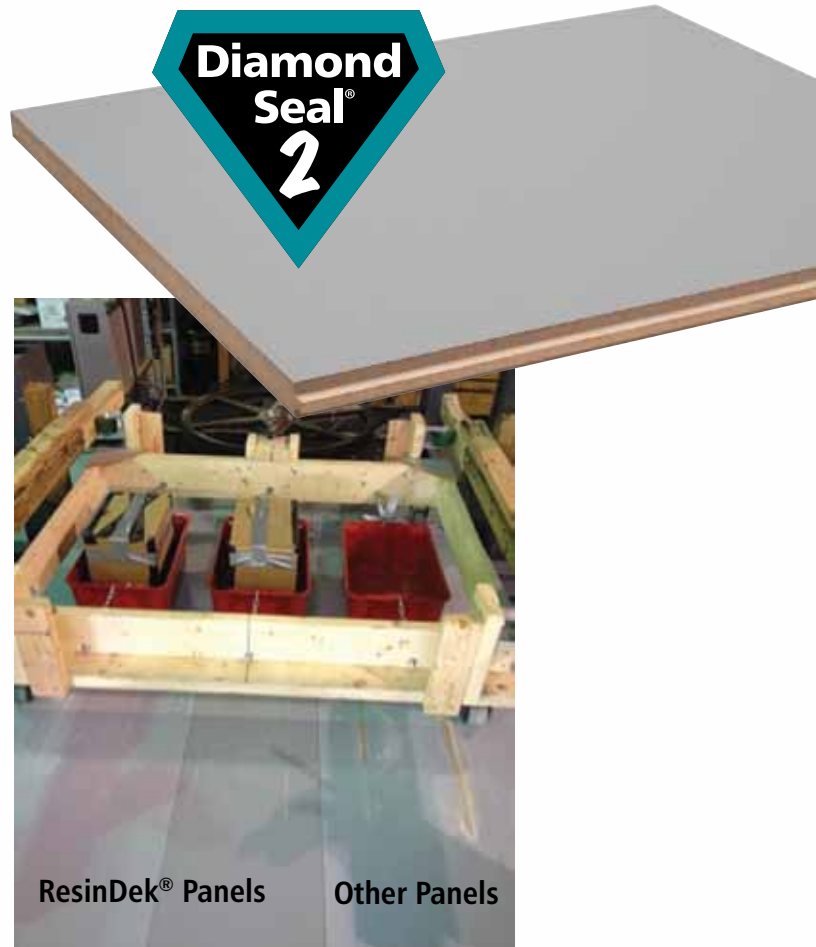

ResinDek [®] Mezzanine Floor Panels		10 YEAR PRODUCT WARRANTY		Finishes Available		
Product Name	Pallet Jack Load Limits **	Thickness	UF	GDS2	ESD	TriGard [™]
ResinDek [®] LD	up to 2,000 lbs.	3/4"	■	■	■	■
ResinDek [®] SD	up to 2,500 lbs.	3/4"	■	■	■	■
ResinDek [®] MD	up to 3,500 lbs.	3/4"	n/a	■	■	■
ResinDek [®] HD	up to 4,500 lbs.	3/4"	n/a	■	■	■
ResinDek [®] MAX	up to 8,000 lbs.	1-1/2"	n/a	■	■	■
* ResinDek [®] Xspan [®]	up to 3,000 lbs.	1-1/8"	n/a	■	■	■
* ResinDek [®] Xspan [®] FR	up to 3,800 lbs.	1-1/8"	n/a	■	■	■

Finishes Available
Unfinished
Gray Diamond Seal 2[™]
ESD Certified Static Control
TriGard[™]

Options
Invisi-Loc[®] fasteners
T & G Configurations

All ResinDek Products can contribute towards earning points for LEED[®] qualified buildings.

* No Corrugated Required
** Includes Weight of Pallet Jack

CORNERSTONE
SPECIALTY WOOD PRODUCTS, LLC[™]
12020 Tramway Drive
Cincinnati, OH 45241
Toll Free: 888.755.3048
Tel: 513.772.5560
Fax: 513.772.5561
www.resindek.com



In-house 35 lb Tote Sliding Test and Independent testing documents our Superior Coating Performance!