

ResinDek New Product Lineup

★ ResinDek[®] LD

ResinDek[®] LD 3/4" thick panel supports up to 2,000 lbs in live and dead pallet truck loads. This light duty floor panel is a tremendous value for warehouse mezzanine floors, elevated floors or rack platforms. Available in UF (unfinished), Gray Diamond Seal 2[™], ESD or TriGard[®] finishes.

★ ResinDek[®] SD

ResinDek[®] SD, standard duty, is the perfect solution for supporting live and dead pallet truck loads up to 2,500 lbs. This 3/4" thick panel is available in UF (unfinished), Gray Diamond Seal 2[™], ESD or TriGard[®] finishes.

ResinDek[®] MD

When you need to support up to 3,500 lbs in live and dead pallet truck loads, the ResinDek[®] MD, medium duty, 3/4" thick panel is the valued engineered solution. Available in Gray Diamond Seal 2[™], ESD or TriGard[®] finishes.

ResinDek[®] HD


A heavy duty mezzanine flooring panel that must support live and dead pallet jack loads up to 4,500 lbs. Available in Gray Diamond Seal 2[™], ESD or TriGard[®] finishes.

ResinDek[®] MAX

Maximum strength designed and engineered to support electric pallet jacks. At 1-1/2" thick the ResinDek[®] MAX can withstand both the daily rigors of heavy, electric pallet jack rolling loads and dead loads up to 8,000 lbs. Available in Gray Diamond Seal 2[™], ESD or TriGard[®] finishes.

ResinDek[®] Xspan[®]

Structural flooring solution where *NO* metal corrugated substructure is required. This 1-1/8" thick panel supports up to 3,000 lbs in live and dead pallet truck loads. Available in Gray Diamond Seal 2[™], ESD or TriGard[®] finishes. Please refer to the website for ResinDek load spans.

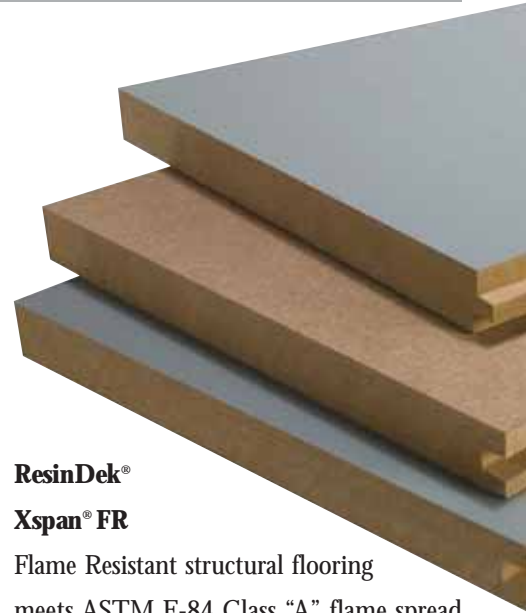

ResinDek[®]

Xspan[®] FR

Flame Resistant structural flooring meets ASTM E-84 Class "A" flame spread less than 25, meets UK Class "O", as well as European standards EN 13501-1 and is rated as C_{FL}-s1. Like the ResinDek Xspan[®], Xspan[®] FR requires no corrugated metal substructure and can support up to 3,800 lbs. This 1-1/8" thick panel is available in Gray Diamond Seal 2[™], ESD or TriGard[®] finishes. Please refer to the website for ResinDek load spans.

NOTE: We recommend that a minimum of 20 gauge metal B Deck be used on all ResinDek[®] flooring projects (with the exception of Xspan[®]) and a minimum of 18 gauge when live and dead pallet jack loads exceed 2,500 lbs.

ResinDek[®] Mezzanine Floor Panels

★ New Product Lineup ★



Product Name	Pallet Jack Load Limits **	Thickness	Finishes Available			
			UF	GDS2	ESD	TriGard [®]
★ ResinDek [®] LD	up to 2,000 lbs.	3/4"	■	■	■	■
★ ResinDek [®] SD	up to 2,500 lbs.	3/4"	■	■	■	■
ResinDek [®] MD	up to 3,500 lbs.	3/4"	n/a	■	■	■
ResinDek [®] HD	up to 4,500 lbs.	3/4"	n/a	■	■	■
ResinDek [®] MAX	up to 8,000 lbs.	1-1/2"	n/a	■	■	■
* ResinDek [®] Xspan [®]	up to 3,000 lbs.	1-1/8"	n/a	■	■	■
* ResinDek [®] Xspan FR [®]	up to 3,800 lbs.	1-1/8"	n/a	■	■	■

Finishes Available

Unfinished
Gray Diamond Seal 2[™]
ESD Certified Static Control
TriGard[®]

Options

Invisi-Loc[®] fasteners
T & G Configurations

All ResinDek Products can contribute towards earning points for LEED[®] qualified buildings.

* No Corrugated Required
** Includes Weight of Pallet Jack



CORNERSTONE
SPECIALTY WOOD PRODUCTS, LLC[™]

12020 Tramway Drive
Cincinnati, OH 45241
Toll Free: 888.755.3048
Tel: 513.772.5560
Fax: 513.772.5561
www.resindek.com

©2017 Cornerstone Specialty Wood Products, LLC[™]
All rights reserved. Cornerstone Specialty Wood Products, LLC, the Cornerstone logo, the 10-year warranty logo, ResinDek, The Panel of Experts, Xspan, TriGard, Diamond Seal 2 and Invisi-Loc are trademarks of Cornerstone Specialty Wood Products, LLC[™].